




610 Series Panel Mount Indicators

Application:

The 610 Series LED Panel Mount Indicators are designed for a variety of applications such as:

- Main power indication
- Remote power indication
- Status indication
- Maintenance and warning indication
- Instrumentation

...and many more!

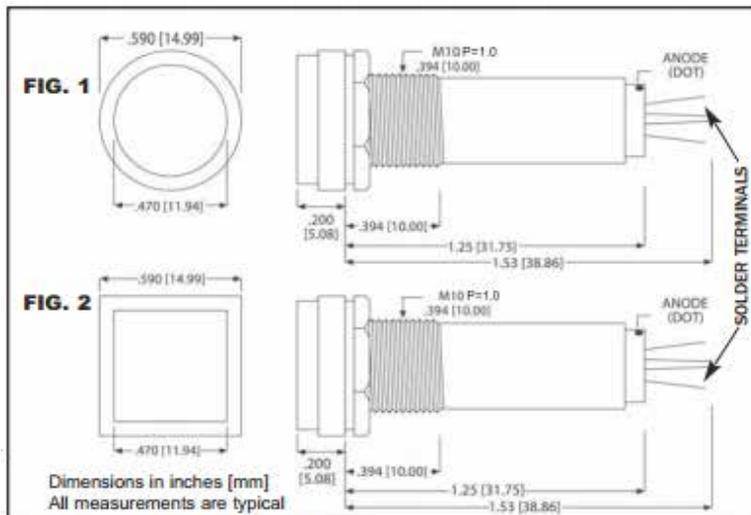

Mechanical Information

Mounting Hole Size:	0.406" (10.3 mm)
Max Panel Thickness:	0.236" (6.0 mm)
Mounting Torque:	0.217 lbs/ft (3 kg/cm) torque

Electrical specifications

Operating Voltage:	6V DC (no resistor required)
Operating Temp:	-25°C to +85°C
Storage Temp:	-40°C to +100°C
Electrical connection	Solder terminals

Construction

Housing:	Polycarbonate
----------	---------------

Certifications & Ratings

- RoHS Compliant

Features & Benefits

- Low power consumption - uses up to 90% less energy than an incandescent indicator
- No heat generated
- Long life, lasting up to 100K hours
- Colors include red, green, and yellow
- Front panel mounting
- Round or square lens shape



610 Series - Panel Mount Indicators Ordering Information

Part Number	Color	Voltage (V DC)	Current (mA)	Intensity Typ. (mcd)	LED Shape	Housing	Figure
610-3132-120F	Red	6	15	60	Round	Polycarbonate	1
610-3232-120F	Green	6	15	110	Round	Polycarbonate	1
610-3332-120F	Yellow	6	15	90	Round	Polycarbonate	1
610-4132-120F	Red	6	15	60	Square	Polycarbonate	2
610-4232-120F	Green	6	15	110	Square	Polycarbonate	2
610-4332-120F	Yellow	6	15	90	Square	Polycarbonate	2