

# Low Capacitance SMD ESD Protection Diode

**Comchip**  
SMD Diode Specialist

## CPDT-5V0USP-HF

RoHS Device  
Halogen Free





### Features

- IEC61000-4-2 Level 4 ESD protection
- Surface mount package.
- High component density.

### Mechanical data

- Case: SOT-23 Standard package, molded plastic.
- Terminals: Solderable per MIL-STD-750, method 2026.
- Mounting position: Any.
- Weight: 0.0078 grams(approx.).

### Circuit diagram

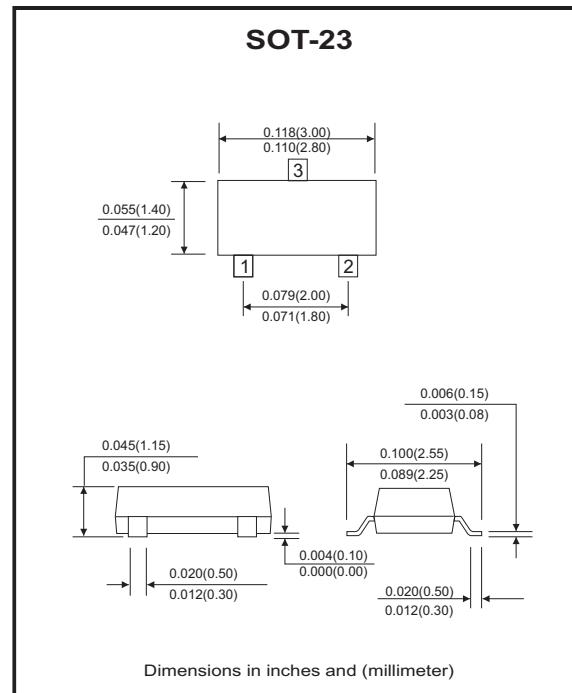

### Maximum Rating (at TA=25°C unless otherwise noted)

Parameter	Conditions	Symbol	Value	Unit
Peak pulse power	T <sub>P</sub> = 8/20us	P <sub>PP</sub>	76	W
Peak pulse current	T <sub>P</sub> = 8/20us	I <sub>PP</sub>	4	A
ESD capability	IEC 61000-4-2(air) IEC 61000-4-2(contact)	ESD	±15 ±8	kV
Operation temperature range		T <sub>j</sub>	-55~+150	°C
Storage temperature range		T <sub>STG</sub>	-55~+150	°C

### Electrical Characteristics (at TA=25°C unless otherwise noted)

Parameter	Conditions	Symbol	Min	Typ	Max	Unit
Working peak reverse voltage		V <sub>RWM</sub>			5	V
Breakdown voltage	I <sub>T</sub> = 1mA	V <sub>BR</sub>	6			V
Reverse leakage current	V <sub>RWM</sub> = 5V	I <sub>R</sub>			0.5	uA
Forward voltage	I <sub>F</sub> = 10mA	V <sub>F</sub>			1.2	V
Clamping voltage	I <sub>PP</sub> = 1A, T <sub>P</sub> = 8/20us I <sub>PP</sub> = 4A, T <sub>P</sub> = 8/20us	V <sub>c</sub>			12 19	V
Junction capacitance	V <sub>R</sub> = 0V, f = 1MHz (I/O pin to I/O pin)	C <sub>J</sub>		0.3	0.45	pF
	V <sub>R</sub> = 0V, f = 1MHz (I/O pin to GND pin)	C <sub>J</sub>		0.6	0.9	pF

Company reserves the right to improve product design , functions and reliability without notice.

REV:A

# Low Capacitance SMD ESD Protection Diode

**Comchip**  
SMD Diode Specialist

## RATING AND CHARACTERISTIC CURVES (CPDT-5V0USP-HF)

Fig.1 - 8/20us Peak Pulse Current  
Wave Form Acc. IEC 61000-4-5

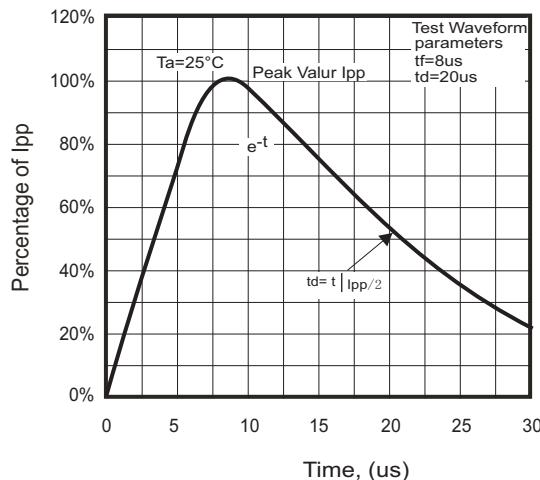


Fig.2 - Power Rating Derating Curve

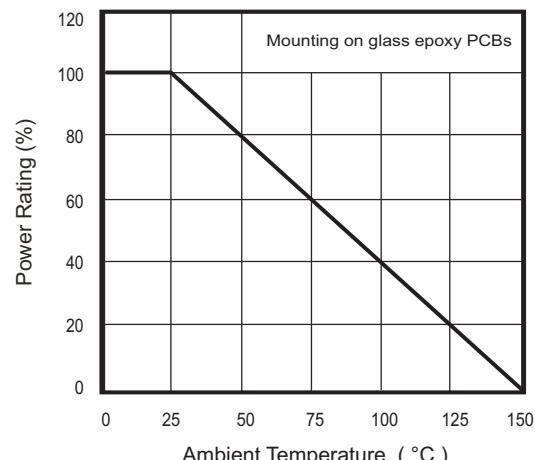


Fig.3 - Forward Characteristic

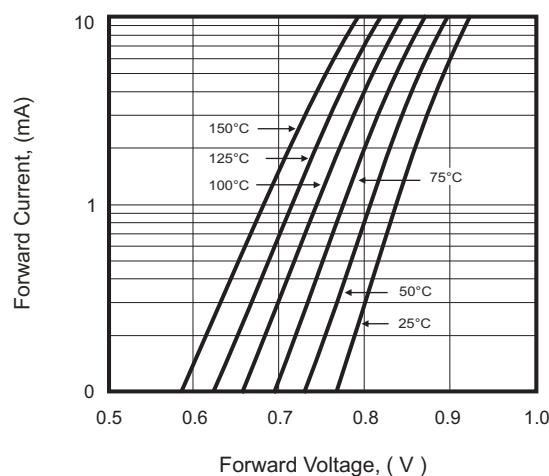


Fig.4 - Clamping Voltage Vs.  
Peak Pulse Current


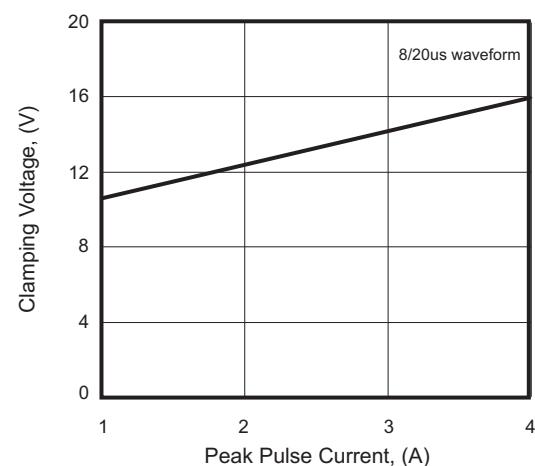






Fig.5 - Capacitance Between  
Terminals Characteristics

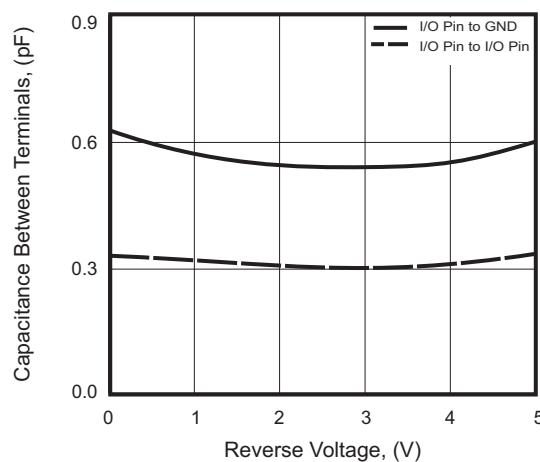

# Low Capacitance SMD ESD Protection Diode

**Comchip**  
SMD Diode Specialist

## Reel Taping Specification

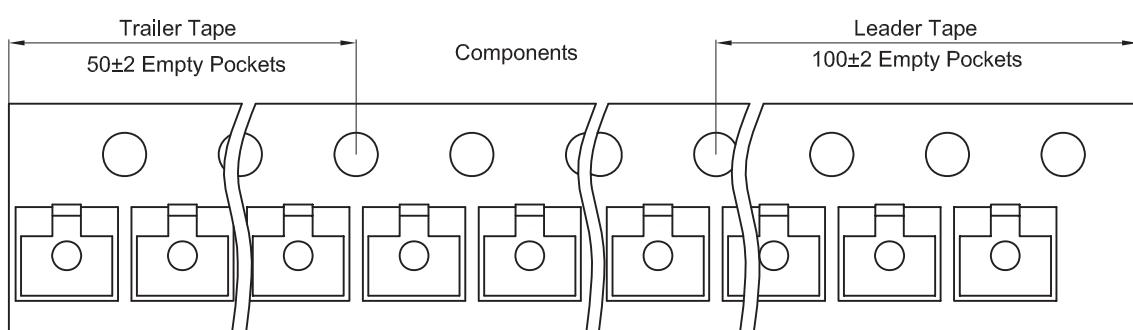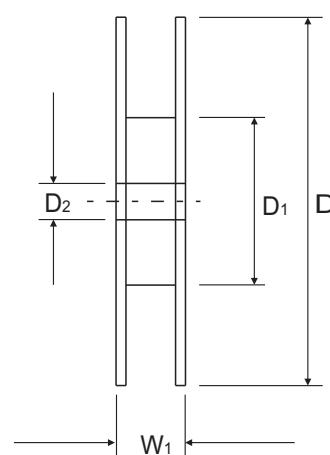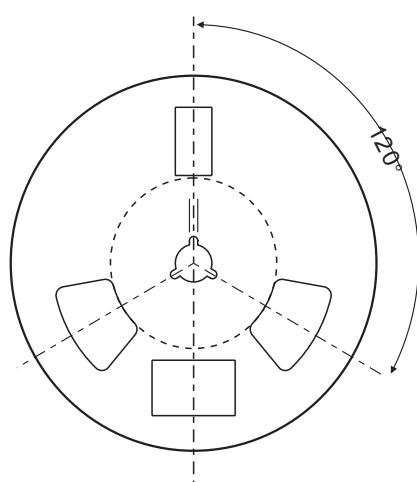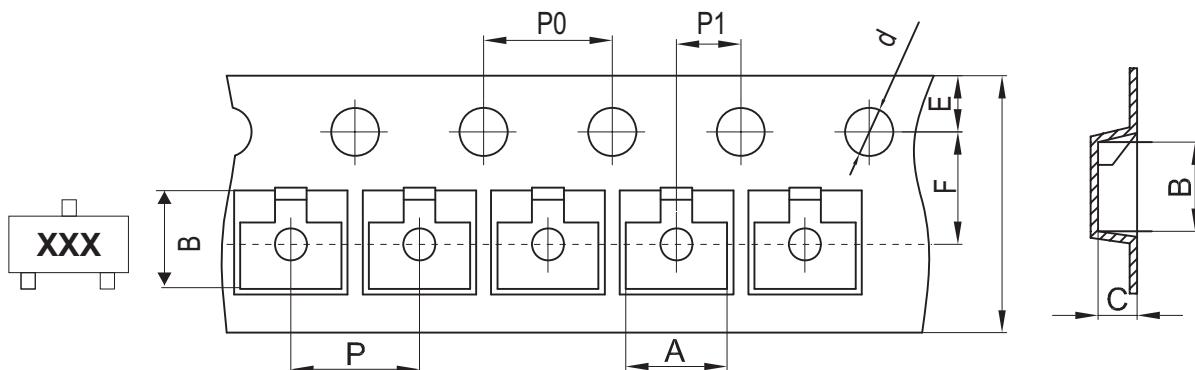

SOT-23	SYMBOL	A	B	C	d	D	D1	D2
(mm)	$3.15 \pm 0.10$	$2.77 \pm 0.10$	$1.22 \pm 0.10$	$1.50 \pm 0.10$	$178.00 \pm 2.00$	$54.40 \pm 1.00$	$13.00 \pm 1.00$	
(inch)	$0.124 \pm 0.004$	$0.109 \pm 0.004$	$0.048 \pm 0.004$	$0.059 \pm 0.004$	$7.008 \pm 0.079$	$2.142 \pm 0.039$	$0.512 \pm 0.039$	

SOT-23	SYMBOL	E	F	P	P0	P1	W	W1
(mm)	$1.75 \pm 0.10$	$3.50 \pm 0.10$	$4.00 \pm 0.10$	$4.00 \pm 0.10$	$2.00 \pm 0.10$	$8.00 + 0.30 / - 0.10$	$12.30 \pm 1.00$	
(inch)	$0.069 \pm 0.004$	$0.138 \pm 0.004$	$0.157 \pm 0.004$	$0.157 \pm 0.004$	$0.079 \pm 0.004$	$0.315 + 0.012 / - 0.004$	$0.484 \pm 0.039$	


## Marking Code

Part Number	Marking Code
CPDT-5V0USP-HF	E5UP



## Suggested PAD Layout

SIZE	SOT-23	
	(mm)	(inch)
A	0.80	0.031
B	1.90	0.075
C	2.02	0.080
D	2.82	0.111
E	0.80	0.031

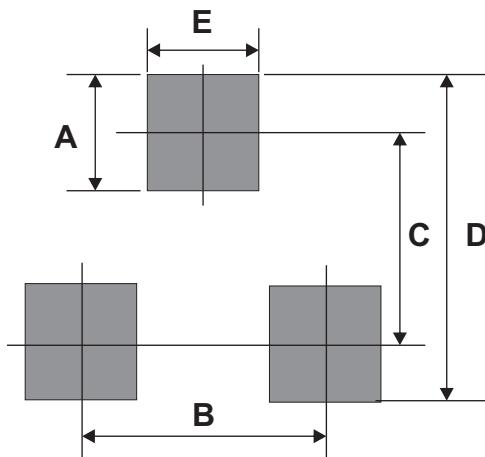

## Standard Packaging

Case Type	REEL PACK	
	REEL ( pcs )	Reel Size (inch)
SOT-23	3,000	7