

page 1 of 5

date 11/12/2007


PART NUMBER: CPE-165 DESCRIPTION: piezo audio transducer

## **SPECIFICATIONS**

operating voltage	30 Vp-p max.	
current consumption	11 mA max.	at 10 Vp-p, sqaure wave, 4.8 Khz
sound pressure level	85 db min.	at 10 cm/10 Vp-p, sqaure wave, 4.8 Khz
electrostatic capacity	15,000 ± 30%	at 1 Khz/1 V
operating tempurature	-30 ~ +85° C	
storage tempurature	-40 ~ +95° C	
dimensions	Ø14.0 x H4.0 mm	
weight	1.0 g max.	
material	ABS UL-94 1/16" HB high h	neat (black)
terminal	wire type	
RoHS	yes	

## **APPEARANCE DRAWING**

tolerance: ±0.5 units: mm

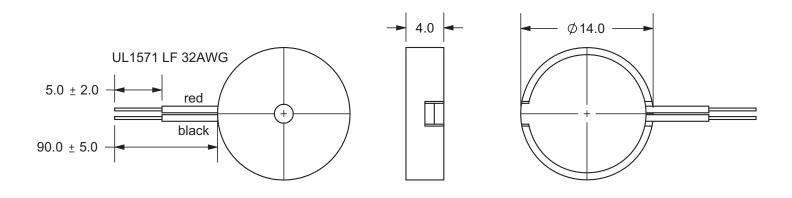




page 2 of 5


date 11/12/2007

PART NUMBER: CPE-165 DESCRIPTION: piezo audio transducer

### FREQUENCY RESPONSE CURVE

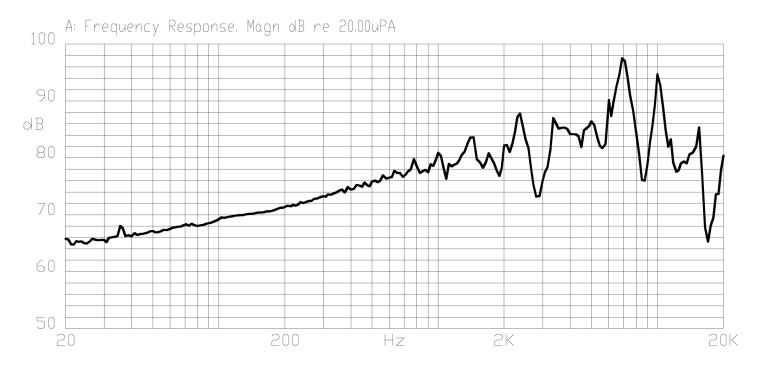

#### **MEASUREMENT METHOD**

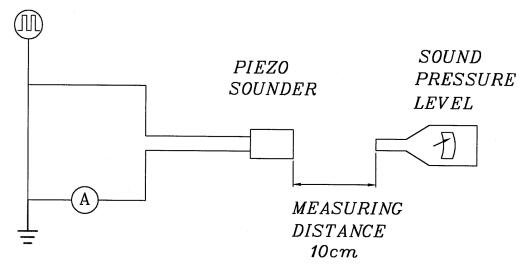

S.P.L. Measuring Circuit

Input Signal: 10 Vp-p, 4.8 KHz, square wave Mic: RION S.P.L. meter UC30 or equivalent

S.G.: Hewlett Packard 33120A function generator or equivalent



page 3 of 5

date 11/12/2007

PART NUMBER: CPE-165 DESCRIPTION: piezo audio transducer

### **MECHANICAL CHARACTERISTICS**

item	test condition	evaluation standard	
solderability	Stripped wires are immersed in rosin for	90% min. of the lead terminals	
	5 seconds and then immersed in solder bath	will be wet with solder	
	of 270 ±5°C for 3 ±1 seconds.	(except the edge of the terminal).	
soldering heat resistance	Stripped wires are immersed up to 1.5mm from		
	buzzer's body in solder bath of 300 ±5°C for	No interference in operation.	
	3 ±0.5 seconds or 260 ±5°C for 10 ±1 seconds.		
lead wire pull strength	The pull force shall be applied to lead wire:		
	Horizontal 3.0N	No damage or cutting off.	
	Vertical 2.0N		
vibration	The buzzer shall be measured after applying		
	a vibration amplitude of 1.5 mm with 10 to	The value of oscillation	
	55 Hz band of vibration frequency to each of	frequency/current consumption	
	the 3 perpendicular directions for 2 hours.	should be ±10% of the initial	
drop test	The part will be dropped from a height of	measurements. The SPL should	
	75 cm onto a 40 mm thick wooden board 3	be within ±10dB compared with	
	times in 3 axes (X, Y, Z) for a total of 9 drops.	the initial measurement.	
bottom covering pull force	The pull force of 3.0N shall be applied to	No damage or cutting off.	
	bottom covering on the vertical direction.		

#### **ENVIRONMENT TEST**

item	test condition	evaluation standard
high temp. test	After being placed in a chamber at +95°C for 240 hours.	
low temp. test	After being placed in a chamber at -40°C for 240 hours.	The buzzer will be measured after being placed at +25°C for 4 hours. The value of the oscillation frequency/current consumption should be ±10% compared to the initial measurements. The SPL should be within ±10dB compared to the initial measurements.
humidity test	After being placed in a chamber at +40°C and 90±5% relative humidity for 240 hours.	
temp. cycle test	The part shall be subjected to 5 cycles. One cycle will consist of:  +95°C  -40°C  0.5hr  0.5hr  0.5hr  0.5hr  0.5hr  0.5hr  0.5hr  0.5hr	



page 4 of 5

date 11/12/2007

PART NUMBER: CPE-165 DESCRIPTION: piezo audio transducer

## **RELIABILITY TEST**

item	test condition	evaluation standard
operating (life test)	Continuous life test:	The buzzer will be measured after
	The part will be subjected to 48 hours of	being placed at +25°C for 4
	continuous operation at +70°C with rated	hours. The value of the
	voltage applied.	oscillation frequency/current consumption should be ±10%
	2. Intermittent life test:	compared to the initial
	A duty cycle of 1 minute on, 1 minutes off, a	measurements. The SPL should
	minimum of 5,000 times at room temp (+25 ±2°C) with rated voltage applied.	be within ±10dB compared to the initial measurements.

## **TEST CONDITIONS**

standard test condition	a) tempurature: +5 ~ +35°C	b) humidity: 45 - 85%	c) pressure: 860-1060 mbar
judgement test condition	a) tempurature: +25 ±2°C	b) humidity: 60 - 70%	c) pressure: 860-1060 mbar



page 5 of 5

date 11/12/2007

PART NUMBER: CPE-165 DESCRIPTION: piezo audio transducer

# **PACKAGING**

