PIEZOELECTRIC INVERTER 1.0W/3.6V/500VAC/1mA

1. Scope

This applies to the CFL Inverter (cold-cathode tube inverter) HBL-0210.

- 2. Electrical Characteristics
 - a. Absolute Maximum Rating

Input voltage		6.5V MAX.		
Max.	output	power	1.0W	MAX.

b. Input/Output Characteristics


The measuring circuit and measuring method shall be as set forth in Section 3. (Unless otherwise specified, Ta = 25°C)
Values are those obtained 3 minutes after the power is turned on.

Item	Specification
Input Voltage	3.0V ~ 5.5V
Rated tube current	1.0mArms ± 10%
Frequency	160KHz ± 10%
Output open voltage	900Vrms min (at ambient temperature 0°C)
Input current	200mA MAX (Vin = 3.0V Eqivalent load resistance $380K\Omega$)
ON/OFF function	ON: ON/OFF terminal signal HIGH (2.5V ~ 5.5V) OFF: ON/OFF terminal signal LOW (0.7V MAX) (To turn on the inverter, apply voltage to the Vin terminal, then turn on the ON/OFF terminal.)
Vcc voltage	5.0V ± 5%
Vcc current	15mA MAX.

c. Dimming


To use the dimming function, apply the following signal to the ON/OFF terminal, with a Duty rate of 20% ~ 95%.

No Dimming function with 100% Duty rate (always High)

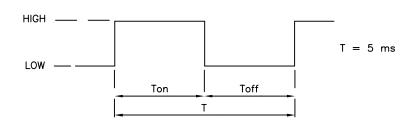


FILE NAME: ACAD\MXFMR\A3122581.DWG	SCALE: NONE	REV: D	DATE: 10/19/00	SHEET 1 OF 5	
TAMURA CORPORATION OF AMERICA	TITLE:	0040	PIEZOELECTRIC		
43352 BUSINESS PARK DRIVE • TEMECULA • CA • 92590	HBL-0210		1.0W/3.6V/500VAC/1mA		
TEL: (909)699-1270 • FAX: 9096769482	DOCUMENT	NUMBER:	P-A3-12	2258	
CONTENTS OF THIS DRAWING ARE SUBJECT TO CHANCE WITHOUT PRIOR NOTICE			1 70 1		

- d. Standby Current 5 μ A MAX @ ON/OFF terminal signal LOW, Vin=3.0V \sim 5.5V
- e. Input Sequence

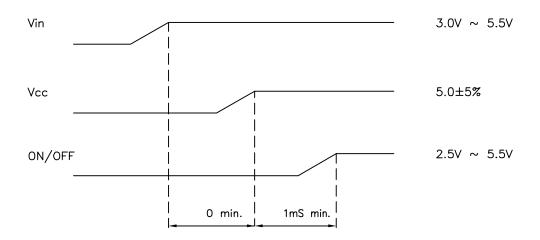

3. Measuring Circuit and Method for Electrical Characteristic

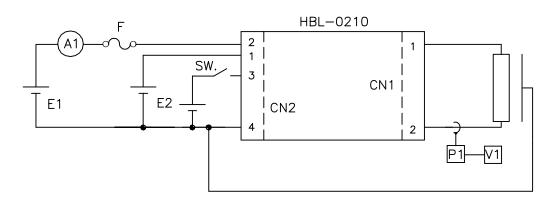

E1: DC regulated power supply $3.0V \sim 5.5V$ E2: DC regulated power supply $5.0V\pm5\%$ E3: DC regulated power supply $2.5V \sim 5.5V$ V1: RMS voltmeter 3400B (YHP) or equivalent 1.5V or equivalent 1.5V or equivalent P1: Probe 1.5V P6021 (Tektronix) or equivalent 1.5V P6021 (Tektronix) or equivalent 1.5V P6021 (Tektronix) or equivalent 1.5V P6021 (Tektronix) 1.5V P6021 (Tektronix) or equivalent 1.5V P6021 (Tektronix) or equivalent 1.5V P6021 (Tektronix) 1.5V P6021 (Tektron

FILE NAME: ACAD\MXFMR\A3122582.DWG	SCALE: NONE	REV: D	DATE: 10/19/00 S	SHEET 2 OF 5
TAMURA CORPORATION OF AMERICA	TITLE:	0010	PIEZOELECTRIC	
43352 BUSINESS PARK DRIVE • TEMECULA • CA • 92590	HBI	0210	1.0W/3.6V/500\	/AC/1mA
TEL: (909)699-1270 • FAX: 9096769482	DOCUMENT	NUMBER:	P-A3-12	258
CONTENTS OF THIS DRAWING ARE SUBJECT TO CHANCE WITHOUT DRIOD NOTICE	1		I - AJ - IZ	

L: Specified CCFL tube or equivalent resistance $(\simeq 161 \text{k}\Omega)$

CONTENTS OF THIS DRAWING ARE SUBJECT TO CHANGE WITHOUT PRIOR NOTICE

4. Ambient Conditions

a. Temperature

Operating temperature: 0°C ~ 60°C Storage temperature: -20°C ~ 70°C

b. Humidity

Operating humidity: 20% ~ 80% (No condensation) Storage humidity: 5% ~ 90% (No condensation)

5. Reliability

The reliability has been verified on the following items


Item	Specification			
High temp. storage	Ambient temperature 70°C, 240H			
Low temp. storage	Ambient temperature -20°C, 240H			
High temp. and humidity storage	Ambient temperature 40°C, Humidity 90%, 240H			
Temperature Cycle	−20°C ~ 70°C, 5 cycle			
High temperature operation Ambient temperature 60°C, input voltage 5.5V, out current 2.0mArms, 500H (Equivalent load resistance)				
ON/OFF test	1 min:ON, 1min:OFF, 50000 times (Input voltage 5.5V, output current 2.0mArms, Equivalent load resistance)			
Vibration	Acceleration 3G, frequency 10~ 55Hz, sweep 45 min. Once in each of X, Y, and Z directions.			
Shock	Acceleration 80G, acting time 11ms, 3 times in each of X, Y, and Z directions.			

After the end of each test, leave the product at room temperature and humidity for 24 hours. The Electrical and Mechanical characteristics shall remain within spec.


6. Precautions for static electricity

When transporting this product, use materials that will not develop an electrical charge. When handling this product, be sure to wear antistatic wrist bands or other protective equipment to prevent the product from being destroyed by any electric charge.


FILE NAME: ACAD\MXFMR\A3122583.DWG	SCALE: NONE REV: D DATE: 10/19/00 SHEET 3 OF 5
TAMURA CORPORATION OF AMERICA	TITLE: PIEZOELECTRIC INVERTER
43352 BUSINESS PARK DRIVE • TEMECULA • CA • 92590	HBL-0210 1.0W/3.6V/500VAC/1mA
TEL: (909)699-1270 • FAX: 9096769482	DOCUMENT NUMBER: P-A3-12258
CONTENTS OF THIS DRAWING ARE SUBJECT TO CHANGE WITHOUT PRIOR NOTICE	1 70 12200

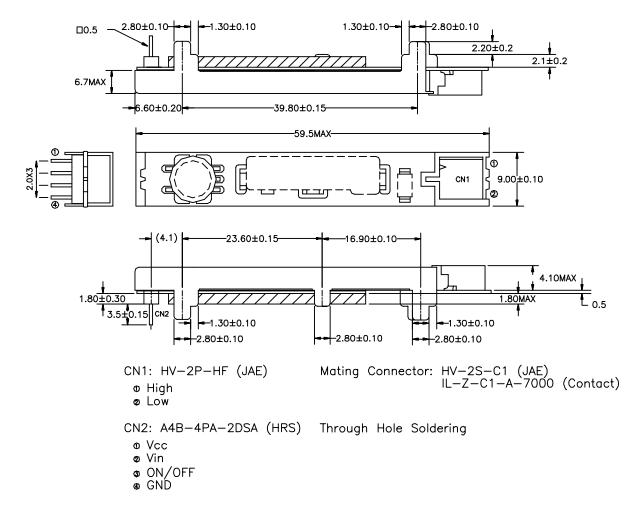

RECOMMENDED BOARD LAYOUT

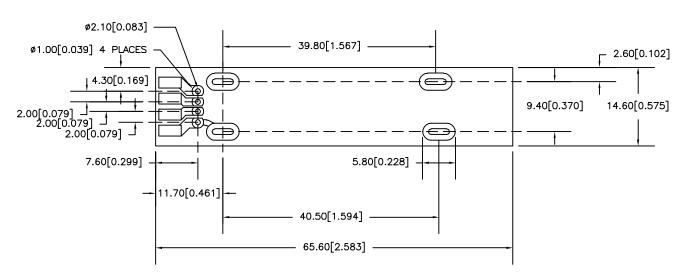

FILE NAME: ACAD\MXFMR\A3122584.DWG	SCALE: NONE	REV: D	DATE: 10/19/00 SHEET 4 OF 5
TAMURA CORPORATION OF AMERICA	TITLE:		PIEZOELECTRIC INVERTER
43352 BUSINESS PARK DRIVE • TEMECULA • CA • 92590	HBI	L-0210	1.0W/3.6V/500VAC/1mA
TEL: (909)699-1270 • FAX: 9096769482	DOCUMENT	NUMBER:	P-A3-12258
CONTENTS OF THIS DRAWING ARE SUBJECT TO CHANGE WITHOUT PRIOR NOTICE			1 70 12200

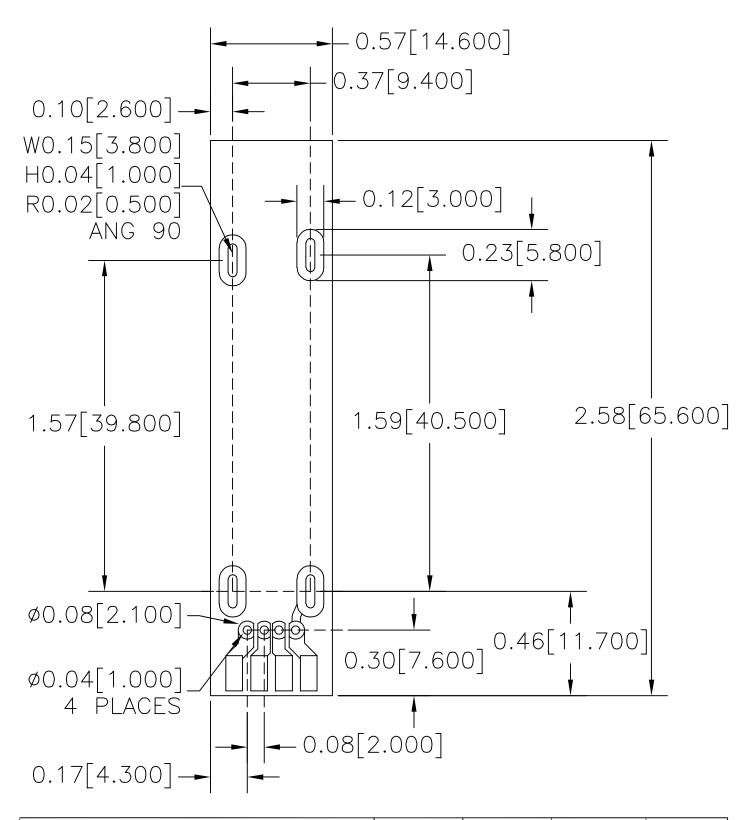

FILE NAME: ACAD\MXFMR\A3122585.DWG	SCALE: 4/1	REV: D	DATE: 10/19/00	SHEET 5 OF 5
TAMURA CORPORATION OF AMERICA 4.3.3.5.2 BUSINESS PARK DRIVE • TEMECULA • CA • 92.5.90	TITLE: HBl	0040	PIEZOELECTRIC 1.0W/3.6V/500	
TEL: (909)699-1270 • FAX: 9096769482 CONTENTS OF THIS DRAWING ARE SUBJECT TO CHANGE WITHOUT PRIOR NOTICE	DOCUMENT	NUMBER:	P-A3-12	2258