

Bulgin's extensive range of fuseholders are designed to give the degree of protection demanded in today's sophisticated electronic equipment. Carrying world-wide safety approvals from UL, VDE, CSA and IMQ, all types are manufactured from high grade flame retardant nylon and polyester materials.

Designed primarily for 5 x 20mm and 6.3 x 32mm size fuses with protection against shock to categories PC1, PC2 and PC3. There's a choice of styles for in-line, PCB mounting and panel mounting (screw or snap fit) with terminal options for solder, 2.8mm, 4.8mm or 6.3mm tabs or PC spills.Dust and waterproof designs provide a front of panel seal to IP68 in both 5 x 20mm and 6.3 x 32mm size fuses.

Fuse carrier styles include captive drawer, screw cap - with screw driver release, bayonet cap - with screw driver release and screw cap - with finger release.

Panel Mounting	302-308
IP68 Panel Mounting	309
IP66 Panel Mounting	310
PC Mounting	311-312
Base Mounting	313
In-line	314-315



Fuseholders Protection Category



Category PC1:

No integral protection against electric shock. If required, Designers/ Manufacturers must provide additional protection against electric shock on equipment.

Category PC2:

With integral protection against electric shock. Fuseholders shall have live parts inaccessible to IEC 60529 Standard Test Finger, when fully assembled, without fuse carrier or fuse in place and when fuse carrier, with fuse is being inserted or withdrawn.

Category PC3:

With integral protection against electric shock. Fuseholders shall have live parts inaccessible to IEC 60529 1mm dia. rigid test wire when fully assembled, without fuse carrier or fuse in place and when fuse carrier, with fuse, is being inserted or withdrawn.







Specifications	FX0430/Termination	FX0430/PC
Fuse Size:	5 x 20mm	5 x 20mm
Fuse Carrier:	Captive Drawer	Captive Drawer
Terminations:	/28 (2.8mm solder), /48 (4.8mm tab), /63 (6.3mm tab)	/PC (PC spills)
Max. Rating:	10A, 250V (16A, 250V a.c. UL)	10A, 250V (16A, 250V a.c. UL)
Max. Power Dissipation:	2.5W (@ 23°C)	2.5W (@ 23°C)
Insulation Resistance:	>10MΩ @ 500V d.c.	>10MΩ @ 500V d.c.
A.C. Breakdown:	>2kV	>2kV
Contact Resistance:	<10mΩ	<10mΩ
Operating Temp: Mouldings:	–20°C to +85°C (ambient air temp + fuse temp rise)	–20°C to +85°C (ambient air temp + fuse temp rise)
Body/Drawer: Cap: Nut:	Nylon UL94V-0 rated	Nylon UL94V-0 rated
Contacts:	Contact tags: Brass, Tin Plated Fuse Clips: Phospher Bronze, Nickel Plated	Contact tags: Brass, Tin Plated Fuse Clips: Phospher Bronze, Nickel Plated
Approvals:	A 916 (0)	🗠 FL @
Accessories:		
Note:		

RoHS

Compliant

Compliant








				Ø12, <u>80±0</u> ,05015.907177
Panel Mount	54, FX0455	 Fuse S Screw Keywa D Pane 	tion Category PC2 ize 5 x 20mm Cap/Screwdriver Release y Panel Cutout (FX0454) el Cutout (FX0455) 50V (16A, 250V UL)	Fixing Details FX0455 Fixing Details FX0454 Fixing Details FX0454 Fixing Details FX0454 Fixing Details FX0454
Panel Mount	54/S, FX0455/S	 Fuse S Screw High P Keyway (FX045) D Pane 	tion Category PC2 ize 5 x 20mm Cap/Screwdriver Release rofile Bezel y Panel Cutout i4/S) el Cutout (FX0455/S) 50V (16A, 250V UL)	9 012.80±0.05 015.9 12.3 31.8 Fixing Details FX0455/S 5.6 MAX Panel 0 12.80±0.05 Fixing Details FX0454/S 10 MIN Panel 10 MIN Panel Thickness FX0454/S Only
Snap Fit to Panel	FX0458	 Fuse S Panel S 2.0 & 3 Screw Release 	Cap/Screwdriver	41.7 2.7 41.7 2.7 41.7 <
Specifications				
Specifications	FX0454, FX0455		FX0454/S, FX0455/S	FX0458
Fuse Size:	FX0454, FX0455 5 x 20mm		FX0454/S, FX0455/S 5 x 20mm	FX0458 5 x 20mm
-	,		,	
Fuse Size:	,	release	,	5 x 20mm /1 (1.0-1.5mm panel, black sleeve)
Fuse Size: Panel Size:	5 x 20mm	release	5 x 20mm	5 x 20mm /1 (1.0-1.5mm panel, black sleeve) /2 (2.0-3.0mm panel, grey sleeve)
Fuse Size: Panel Size: Fuse Carrier:	5 x 20mm Screw cap/Screwdriver r		5 x 20mm Screw cap/Screwdriver release	5 x 20mm /1 (1.0-1.5mm panel, black sleeve) /2 (2.0-3.0mm panel, grey sleeve) Screw cap/Screwdriver release
Fuse Size: Panel Size: Fuse Carrier: Terminations:	5 x 20mm Screw cap/Screwdriver r Solder tags		5 x 20mm Screw cap/Screwdriver release Solder tags	5 x 20mm /1 (1.0-1.5mm panel, black sleeve) /2 (2.0-3.0mm panel, grey sleeve) Screw cap/Screwdriver release Solder tags
Fuse Size: Panel Size: Fuse Carrier: Terminations: Max. Rating:	5 x 20mm Screw cap/Screwdriver r Solder tags 10A, 250V (16A, 250V a.		5 x 20mm Screw cap/Screwdriver release Solder tags 10A, 250V (16A, 250V a.c. UL)	5 x 20mm /1 (1.0-1.5mm panel, black sleeve) /2 (2.0-3.0mm panel, grey sleeve) Screw cap/Screwdriver release Solder tags 10A, 250V (16A, 250V a.c. UL)
Fuse Size: Panel Size: Fuse Carrier: Terminations: Max. Rating: Max. Power Dissipation:	5 x 20mm Screw cap/Screwdriver r Solder tags 10A, 250V (16A, 250V a. 2.5W (@ 23°C)		5 x 20mm Screw cap/Screwdriver release Solder tags 10A, 250V (16A, 250V a.c. UL) 2.5W (@ 23°C)	5 x 20mm /1 (1.0-1.5mm panel, black sleeve) /2 (2.0-3.0mm panel, grey sleeve) Screw cap/Screwdriver release Solder tags 10A, 250V (16A, 250V a.c. UL) 2.5W (@ 23°C)
Fuse Size: Panel Size: Fuse Carrier: Terminations: Max. Rating: Max. Power Dissipation: Insulation Resistance:	5 x 20mm Screw cap/Screwdriver r Solder tags 10A, 250V (16A, 250V a. 2.5W (@ 23°C) >10 ² MΩ @ 500V d.c.		5 x 20mm Screw cap/Screwdriver release Solder tags 10A, 250V (16A, 250V a.c. UL) 2.5W (@ 23°C) >10 ² MΩ @ 500V d.c.	5 x 20mm /1 (1.0-1.5mm panel, black sleeve) /2 (2.0-3.0mm panel, grey sleeve) Screw cap/Screwdriver release Solder tags 10A, 250V (16A, 250V a.c. UL) 2.5W (@ 23°C) >10 ² MΩ @ 500V d.c.
Fuse Size: Panel Size: Fuse Carrier: Terminations: Max. Rating: Max. Power Dissipation: Insulation Resistance: A.C. Breakdown:	5 x 20mm Screw cap/Screwdriver r Solder tags 10A, 250V (16A, 250V a. 2.5W (@ 23°C) >10 ² MΩ @ 500V d.c. 7kV @ 50Hz	c. UL)	5 x 20mm Screw cap/Screwdriver release Solder tags 10A, 250V (16A, 250V a.c. UL) 2.5W (@ 23°C) >10 ² MΩ @ 500V d.c. 7kV @ 50Hz	5 x 20mm /1 (1.0-1.5mm panel, black sleeve) /2 (2.0-3.0mm panel, grey sleeve) Screw cap/Screwdriver release Solder tags 10A, 250V (16A, 250V a.c. UL) 2.5W (@ 23°C) >10 ² MΩ @ 500V d.c. 7kV @ 50Hz
Fuse Size: Panel Size: Fuse Carrier: Terminations: Max. Rating: Max. Power Dissipation: Insulation Resistance: A.C. Breakdown: Contact Resistance:	5 x 20mm Screw cap/Screwdriver r Solder tags 10A, 250V (16A, 250V a. 2.5W (@ 23°C) >10 ² MΩ @ 500V d.c. 7kV @ 50Hz <10mΩ -20°C to +85°C	c. UL) temp rise)	5 x 20mm Screw cap/Screwdriver release Solder tags 10A, 250V (16A, 250V a.c. UL) 2.5W (@ 23°C) >10 ² MΩ @ 500V d.c. 7kV @ 50Hz <10mΩ -20°C to +85°C	5 x 20mm /1 (1.0-1.5mm panel, black sleeve) /2 (2.0-3.0mm panel, grey sleeve) Screw cap/Screwdriver release Solder tags 10A, 250V (16A, 250V a.c. UL) 2.5W (@ 23°C) >10°MΩ @ 500V d.c. 7kV @ 50Hz <10mΩ -20°C to +85°C
Fuse Size: Panel Size: Fuse Carrier: Terminations: Max. Rating: Max. Power Dissipation: Insulation Resistance: A.C. Breakdown: Contact Resistance: Operating Temp: Mouldings: Body: Cap:	5 x 20mm Screw cap/Screwdriver r Solder tags 10A, 250V (16A, 250V a. 2.5W (@ 23°C) >10 ² MΩ @ 500V d.c. 7kV @ 50Hz <10mΩ -20°C to +85°C (ambient air temp + fuse Polyester UL94V-0 rated Nylon UL94V-0 rated	c. UL) temp rise)	5 x 20mm Screw cap/Screwdriver release Solder tags 10A, 250V (16A, 250V a.c. UL) 2.5W (@ 23°C) >10 ² MΩ @ 500V d.c. 7kV @ 50Hz <10mΩ -20°C to +85°C (ambient air temp + fuse temp rise) Polyester UL94V-0 rated Nylon UL94V-0 rated	5 x 20mm /1 (1.0-1.5mm panel, black sleeve) /2 (2.0-3.0mm panel, grey sleeve) Screw cap/Screwdriver release Solder tags 10A, 250V (16A, 250V a.c. UL) 2.5W (@ 23°C) >10 ² MΩ @ 500V d.c. 7kV @ 50Hz <10mΩ -20°C to +85°C (ambient air temp + fuse temp rise) Polyester UL94V-0 rated
Fuse Size: Panel Size: Fuse Carrier: Terminations: Max. Rating: Max. Power Dissipation: Insulation Resistance: A.C. Breakdown: Contact Resistance: Operating Temp: Mouldings: Body: Cap: Nut:	5 x 20mm Screw cap/Screwdriver r Solder tags 10A, 250V (16A, 250V a. 2.5W (@ 23°C) >10 ² MΩ @ 500V d.c. 7kV @ 50Hz <10mΩ -20°C to +85°C (ambient air temp + fuse Polyester UL94V-0 rated Nylon UL94V-0 rated Glass Filled Nylon UL94V	c. UL) temp rise)	5 x 20mm Screw cap/Screwdriver release Solder tags 10A, 250V (16A, 250V a.c. UL) 2.5W (@ 23°C) >10°MΩ @ 500V d.c. 7kV @ 50Hz <10mΩ -20°C to +85°C (ambient air temp + fuse temp rise) Polyester UL94V-0 rated Nylon UL94V-0 rated Glass Filled Nylon UL94V-0 rated	5 x 20mm /1 (1.0-1.5mm panel, black sleeve) /2 (2.0-3.0mm panel, grey sleeve) Screw cap/Screwdriver release Solder tags 10A, 250V (16A, 250V a.c. UL) 2.5W (@ 23°C) >10 ² M Ω @ 500V d.c. 7kV @ 50Hz <10m Ω -20°C to +85°C (ambient air temp + fuse temp rise) Polyester UL94V-0 rated Nylon UL94V-0 rated
Fuse Size: Panel Size: Fuse Carrier: Terminations: Max. Rating: Max. Power Dissipation: Insulation Resistance: A.C. Breakdown: Contact Resistance: Operating Temp: Mouldings: Body: Cap: Nut: Contacts:	5 x 20mm Screw cap/Screwdriver r Solder tags 10A, 250V (16A, 250V a. 2.5W (@ 23°C) >10 ² MΩ @ 500V d.c. 7kV @ 50Hz <10mΩ -20°C to +85°C (ambient air temp + fuse Polyester UL94V-0 rated Nylon UL94V-0 rated Glass Filled Nylon UL94V Brass, Silver Plated	c. UL) temp rise) I V-0 rated	5 x 20mm Screw cap/Screwdriver release Solder tags 10A, 250V (16A, 250V a.c. UL) 2.5W (@ 23°C) >10 ² MΩ @ 500V d.c. 7kV @ 50Hz <10mΩ -20°C to +85°C (ambient air temp + fuse temp rise) Polyester UL94V-0 rated Nylon UL94V-0 rated Glass Filled Nylon UL94V-0 rated Brass, Silver Plated	5 x 20mm /1 (1.0-1.5mm panel, black sleeve) /2 (2.0-3.0mm panel, grey sleeve) Screw cap/Screwdriver release Solder tags 10A, 250V (16A, 250V a.c. UL) 2.5W (@ 23°C) >10 ² M Ω @ 500V d.c. 7kV @ 50Hz <10m Ω -20°C to +85°C (ambient air temp + fuse temp rise) Polyester UL94V-0 rated Nylon UL94V-0 rated Brass, Silver Plated



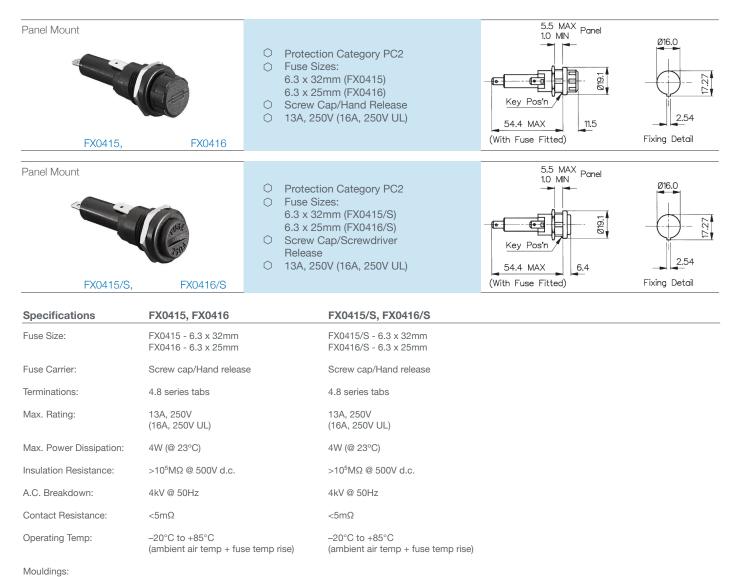

Glass Filled Nylon UL94V-0 rated Nylon UL94V-0 rated Polyester UL94V-0 rated

P.No. 12932 (See page 205)

Brass, Silver Plated

71

Compliant

Approvals:

Contacts:

Accessories:

RoHS

Body:

Cap:

Nut:

F1

P.No. 12932 (See page 205)

Nylon UL94V-0 rated

Brass, Silver Plated

Polyester UL94V-0 rated

Glass Filled Nylon UL94V-0 rated

Compliant

Fuseholders Panel Mounting, PC2









Key Features

- 6.3 x 32mm fuses
- Screwdriver slot knob
- O PC2 protection category
- 4.8, 6.3 and solder terminals
- C Low profile bezel
- Snap in or threaded bushing mounting options

Approvals and specifications

) 16A 250Vac (max fuse rating*) T–55 to T+70 (ambient) Maximum dissipation wattage: 4W

N 6.3A UL 94V2 UL file E92075 CSA file LR44770

These products comply with safety category PC2. *Users should be aware of the de-rating factors published by specialist manufacturers of fuses.

Fuseholders with in-line termination have combination (4.8/6.3) terminals. It has not been possible to show both views here. Units with right angle terminals have user specified end terminals and combination mid-body terminals.



Terminal Options Dimensions Body 0345 (C terminal shown) С RA 0345 (C terminal shown) Screwdriver release 9.1 0 . 17.3 17.4 S 71 @ 6.3 x 0.8 0345 (D terminal shown) D 0345 (D terminal shown) Screwdriver release 16 0/16 1 Panel thickness 9.1 0 0.8 - 2.0mm for snap fit 0.8 - 7.0mm for screw to panel fixing 6.3 x 0.8 S **71 6** Right angle 0347 (C terminal shown) RD 0347 (T terminal shown) Screwdriver release т D 15.0 15.1 ► 2.8 4.8 x 0.8 **B***L***R** © 16.0/16.1 Solder 0347 (D terminal shown) U (U terminal shown) 0347 Panel thickness Screwdriver release 0.8 - 2.0mm for snap fit 0.8 - 7.0mm for screw to 9.1 panel fixing -42.0 4.8 x 0.8 Optional metal fixing nut available for 0347 **9 14** 2 Solder


Fuseholders Panel Mounting, PC1





Specifications	FX0296, FX0296/S	FX0296/1
Fuse Size:	5 x 20mm	5 x 20mm
Fuse Carrier:	FX0296 Screw cap/Hand release FX0296/S Screw cap/Screwdriver release	Screw cap/Hand release
Terminations:	Solder tags	Solder tags
Max. Rating:	6.3A, 250V	6.3A, 250V
Max. Power Dissipation:	2.5W (@ 23°C)	2.5W (@ 23°C)
Insulation Resistance:	$>10^5 M\Omega @ 500 V d.c.$	>10 ⁵ MΩ @ 500V d.c.
A.C. Breakdown:	2.5kV @ 50Hz	2.5kV @ 50Hz
Contact Resistance:	<5mΩ	<5mΩ
Operating Temp:	–20°C to +85°C (ambient air temp + fuse temp rise)	–20°C to +85°C (ambient air temp + fuse temp rise)
Mouldings: Body: Cap: Nut:	Glass Filled Nylon UL94V-0 rated Nylon UL94V-0 rated Glass Filled Nylon UL94V-0 rated	Glass Filled Nylon UL94V-0 rated Nylon UL94V-0 rated Glass Filled Nylon UL94V-0 rated
Contacts:	Brass, Silver or Tin Plated	Brass, Silver or Tin Plated
Accessories	P.No. 9820 (See page 205)	P.No. 9820 (See page 205)
RoHS	Compliant	Compliant



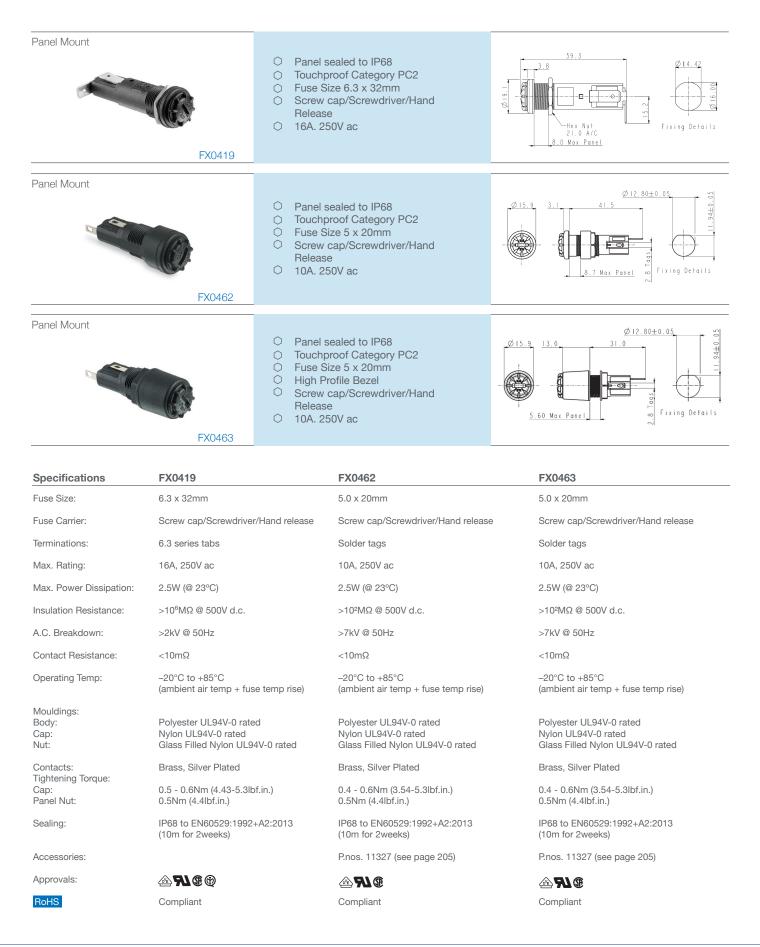





FX0365

Specifications	FX0345, FX0345/A	FX0365, FX0365/A
Fuse Size:	5 x 20mm	5 x 20mm
Fuse Carrier:	Screw cap/Screwdriver release	Screw cap/Screwdriver release
-		
Terminations:	Solder tags	Solder tags
Max. Rating:	6.3A, 250V	6.3A, 250V
Max. Power Dissipation:	4W (@ 23°C)	4W (@ 23°C)
Insulation Resistance:	>10 ³ MΩ @ 500V d.c.	>10³MΩ @ 500V d.c.
A.C. Breakdown:	>3.5kV @ 50Hz	>3.5kV @ 50Hz
Contact Resistance:	<10mΩ	<10mΩ
Operating Temp:	–20°C to +85°C (ambient air temp + fuse temp rise)	–20°C to +85°C (ambient air temp + fuse temp rise)
Mouldings: Body & Cap: Spacer: Insulating Sleeve:	Glass Filled Nylon UL94V-0 rated Glass Filled Nylon UL94HB rated Nylon UL94V-0 rated	Glass Filled Nylon UL94V-0 rated Glass Filled Nylon UL94HB rated Nylon UL94V-0 rated
Contacts:	Brass, Silver Plated	Brass, Silver Plated
Sealing:	Protection Classification IP66 to EN6052 Retains sealing integrity with cap remove	9:1992+A2:2013 ed since they are both panel and barrier sealed
Variants: RoHS	/A Silicone 'O' ring, Op. Temp. –55°C to +85°C Compliant	/A Silicone 'O' ring, Op. Temp. –55°C to +85°C Compliant

Fuseholders PC Mounting PC1, PC2 and PC3



PC Horizontal Mount	 Fus Screen Relet Cap PC 10A 	ection Category PC3 e Size 5 x 20mm ew Cap/Screwdriver ease tive Fuse Carrier Spills , 250V A, 250V UL)	35.0 35.0 3.4 5.08 15.24 90±0.10
PC Horizontal and Vertica	 Prot Fus Bay Relet 10A 	ection Category PC2 e Sizes 5 x 20mm onet Cap/Screwdriver ease , 250V	12.5 SQ 35.1 1.0 10.00 SQ 8.0 5.0 2 Holes Ø 1.3 2.3 Fixing Details
PC Horizontal Mount	C Fus C Two	ection Category PC1 e Size 5 x 20mm or Three PC Spills ew Cap/Hand Release	12.70 CRS Ø127±0.05 13.3 Fixing Details 9 13.3 13.3 13.3 13.3 10 12.7 13.3 10 12.7 13.3 10 12.7 13.3 10 12.7 13.3 10 12.7 13.3 10 12.7 13.3 10 12.7 13.3 10 12.7 13.3 10 12.7 12.7 13.3 10 12.7
FX0:	○ 6.34	A, 250V	15.24 CRS 0127±0.05 Position of Twin Spills
FX0:	○ 6.34		15 24 CRS Ø1.27±0.05
	6.34 330 FX0342	A, 250V	15.24 CRS 01.27±0.05 Position of Twin Spills
Specifications	 6.34 330 FX0342 FX0461 	A, 250V FX0456 FX0457	15.24 CRS 0127±0.05 Position of Twin Spills -
Specifications Fuse Size:	© 6.34 330 FX0342 FX0461 5 x 20mm	FX0456 FX0457 5 x 20mm	FX0330 FX0342 5 x 20mm Screw cap/Hand release FX0330 - 3 PC Spills
Specifications Fuse Size: Fuse Carrier:	© 6.34 330 FX0342 FX0461 5 x 20mm Screw cap/Screwdriver release	FX0456 FX0457 5 x 20mm Bayonet cap/Screwdriver release	FX0330 FX0342 5 x 20mm Screw cap/Hand release
Specifications Fuse Size: Fuse Carrier: Terminations:	State 6.34 FX0342 FX0461 5 x 20mm Screw cap/Screwdriver release PC Spills PC Spills	FX0456 FX0457 5 x 20mm Bayonet cap/Screwdriver release PC Spills	FX0330 FX0342 5 x 20mm Screw cap/Hand release FX0330 - 3 PC Spills FX0342 - 2 PC Spills
Specifications Fuse Size: Fuse Carrier: Terminations: Max. Rating:	6.34 330 FX0342 FX0461 5 x 20mm Screw cap/Screwdriver release PC Spills 10A, 250V (16A, 250V a.c. UL)	FX0456 FX0457 5 x 20mm Bayonet cap/Screwdriver release PC Spills 10A, 250V	FX0330 FX0342 5 x 20mm Screw cap/Hand release FX0330 - 3 PC Spills FX0342 - 2 PC Spills 6.3A, 250V 6.3A, 250V
Specifications Fuse Size: Fuse Carrier: Terminations: Max. Rating: Max. Power Dissipation:	 6.34 330 FX0342 FX0461 5 x 20mm Screw cap/Screwdriver release PC Spills 10A, 250V (16A, 250V a.c. UL) 1.6W (@ 23°C) 	FX0456 FX0457 5 x 20mm Bayonet cap/Screwdriver release PC Spills 10A, 250V 2.5W (@ 23°C)	FX0330 FX0342 5 x 20mm Screw cap/Hand release FX0330 - 3 PC Spills FX0342 - 2 PC Spills 6.3A, 250V 2.5W (@ 23°C)
Specifications Fuse Size: Fuse Carrier: Terminations: Max. Rating: Max. Power Dissipation: Insulation Resistance:	330 FX0342 FX0461 5 x 20mm 5 x 20mm Screw cap/Screwdriver release PC Spills 10A, 250V (16A, 250V a.c. UL) 1.6W (@ 23°C) >10MΩ @ 500V d.c.	FX0456 FX0457 5 x 20mm Bayonet cap/Screwdriver release PC Spills 10A, 250V 2.5W (@ 23°C) >10 ² MΩ @ 500V d.c.	FX0330 FX0342 5 x 20mm Screw cap/Hand release FX0330 - 3 PC Spills FX0342 - 2 PC Spills 6.3A, 250V 2.5W (@ 23°C) >10 ⁴ MΩ @ 500V d.c.
Specifications Fuse Size: Fuse Carrier: Terminations: Max. Rating: Max. Power Dissipation: Insulation Resistance: A.C. Breakdown:	330 FX0342 FX0461 5 x 20mm 5 x 20mm Screw cap/Screwdriver release PC Spills 10A, 250V (16A, 250V a.c. UL) 1.6W (@ 23°C) >10MΩ @ 500V d.c. >2kV >2kV	FX0456 FX0457 5 x 20mm Bayonet cap/Screwdriver release PC Spills 10A, 250V 2.5W (@ 23°C) >10 ² MΩ @ 500V d.c. 4kV @ 50Hz	FX0330 FX0342 5 x 20mm Screw cap/Hand release FX0330 - 3 PC Spills FX0342 - 2 PC Spills 6.3A, 250V 2.5W (@ 23°C) >10 ⁴ MΩ @ 500V d.c. 6kV @ 50Hz
Specifications Fuse Size: Fuse Carrier: Terminations: Max. Rating: Max. Power Dissipation: Insulation Resistance: A.C. Breakdown: Contact Resistance:	 C 6.34 330 FX0342 FX0461 5 x 20mm Screw cap/Screwdriver release PC Spills 10A, 250V (16A, 250V a.c. UL) 1.6W (@ 23°C) >10MΩ @ 500V d.c. >2kV <10mΩ -20°C to +85°C 	FX0456 FX0457 5 x 20mm Bayonet cap/Screwdriver release PC Spills 10A, 250V 2.5W (@ 23°C) >10²MΩ @ 500V d.c. 4kV @ 50Hz <10mΩ	FX0330 FX0342 5 x 20mm Screw cap/Hand release Screw cap/Hand release FX0330 - 3 PC Spills FX0330 - 3 PC Spills FX0342 - 2 PC Spills 6.3A, 250V 2.5W (@ 23°C) >10 ⁴ MΩ @ 500V d.c. 6kV @ 50Hz <5mΩ
Specifications Fuse Size: Fuse Carrier: Terminations: Max. Rating: Max. Power Dissipation: Insulation Resistance: A.C. Breakdown: Contact Resistance: Operating Temp: Mouldings: Body: Cap:	330 FX0342 FX0461 5 x 20mm Screw cap/Screwdriver release PC Spills 10A, 250V (16A, 250V a.c. UL) 1.6W (@ 23°C) >10MΩ @ 500V d.c. >2kV <10mΩ	FX0456FX0457 5×20 mmBayonet cap/Screwdriver releasePC Spills $10A, 250V$ $2.5W$ (@ 23°C) $>10^2M\Omega$ @ 500V d.c. $4kV$ @ 50Hz $<10m\Omega$ $-20^{\circ}C$ to +85°C(ambient air temp + fuse temp rise)Polyester UL94V-0 ratedNylon UL94V-0 rated	IDENTIFY OF TWIN SpillsPosition of Twin SpillsPosition of Twin SpillsFX0330 FX03425 x 20mmScrew cap/Hand releaseFX0330 - 3 PC SpillsFX0330 - 3 PC SpillsFX0342 - 2 PC Spills6.3A, 250V2.5W (@ 23°C)>10 ⁴ MΩ @ 500V d.c.6kV @ 50Hz<5mΩ
Specifications Fuse Size: Fuse Carrier: Terminations: Max. Rating: Max. Power Dissipation: Insulation Resistance: A.C. Breakdown: Contact Resistance: Operating Temp: Mouldings: Body: Cap: End Bung:	$\bigcirc 6.34$ 330 FX0342 \bigcirc FX0461 \bigcirc 5 x 20mm \bigcirc Screw cap/Screwdriver release \bigcirc PC Spills $0A, 250V (16A, 250V a.c. UL)$ $1.6W (@ 23°C)$ $>10M\Omega @ 500V d.c.$ $>2kV$ $<10m\Omega$ \neg \bigcirc C to +85°C (ambient air temp + fuse temp rise) \bigcirc \bigcirc Polyester UL94V-0 rated \bigcirc Nylon UL94V-0 rated	FX0456FX0457 5×20 mmBayonet cap/Screwdriver releasePC Spills $10A, 250V$ $2.5W$ (@ 23°C) $>10^2M\Omega$ @ 500V d.c. $4kV$ @ 50Hz $<10m\Omega$ $-20^{\circ}C$ to $+85^{\circ}C$ (ambient air temp + fuse temp rise)Polyester UL94V-0 rated Polyester UL94V-0 rated Polyester UL94V-0 rated	Position of Twin SpillsPosition of Twin SpillsPosition of Twin SpillsFX0330 FX03425 x 20mmScrew cap/Hand releaseFX0330 - 3 PC SpillsFX0330 - 3 PC SpillsFX0330 - 3 PC SpillsFX0330 - 3 PC SpillsFX0332 - 2 PC Spills6.3A, 250V2.5W (@ 23°C)>10 ⁴ MQ @ 500V d.c.6kV @ 50Hz<5mQ


Fuseholders PC and Base Mounting, PC1



PC Mount	FX0321	 Protection Category PC1 Fuse Size 5 x 20mm PC Spills 6.3A, 250V 	2 Holes Ø 2.0 2.90 CRS Fixing Details
Base Mount	FX0267	 Protection Category PC1 Fuse Size 5 x 20mm Solder Tags 6.3A, 250V 	37.5 G Fixing Hole Ø 2.3 23.4
Base Mount	FX0360	 Protection Category PC1 Fuse Size 5 x 20mm Solder Tags 6.3A, 250V 	Fixing Hole Ø 3.2 C/SK Ø 5.2 x 1.0 Deep 4.57 CRS 0 3.2 Ø 1.83 MAX Ø 1.73 Min ¢ of Fuseholder Fixing Details
Specifications	FX0321	FX0267	FX0360
Fuse Size:	5 x 20mm	5 x 20mm	5 x 20mm
Terminations:	PC Spills	Solder tags	Solder tags
Max. Rating:	6.3A, 250V	6.3A, 250V	6.3A, 250V
Insulation Resistance:	>10⁵MΩ @ 500V d.c.	>10 ⁵ MΩ @ 500V d.c.	>10 ⁴ MΩ @ 500V d.c.
A.C. Breakdown:	7kV @ 50Hz (Clip to clip)	1.5kV @ 50Hz	2kV @ 50Hz
Contact Resistance:	<10mΩ	<10mΩ	<10mΩ
Operating Temp: (ambient air temp + fuse temp rise)	–20°C to +85°C	–20°C to +85°C	–20°C to +85°C
Base Material:	Glass Filled Nylon UL94V-0 r	ated Glass Filled Nylon UL94V-0 rated	Glass Filled Nylon UL94HB rated
Contacts:	Phospher Bronze, Tin Plated	Phospher Bronze, Tin Plated	Phospher Bronze, Tin Plated
Accessories:	P.No. 12760 (See page 205)	P.No. 12760 (See page 205)	
RoHS	Compliant	Compliant	Compliant

Fuseholders Base Mounting, PC1



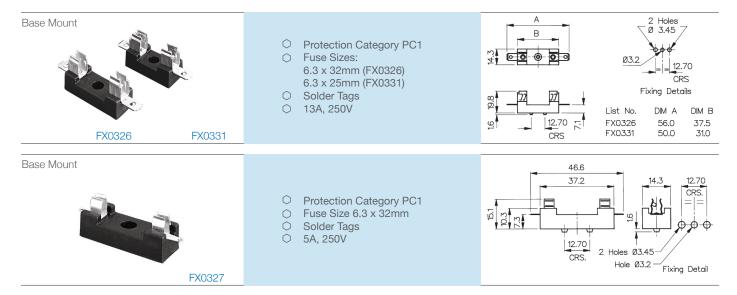

Specifications	FX0326, FX0331	FX0327
Fuse Size:	FX0326 - 6.3 x 32mm FX0331 - 6.3 x 25mm	6.3 x 32mm
Terminations:	6.3 series tabs	Solder tags
Max. Rating:	13A, 250V	5A, 250V
Insulation Resistance:	>10 ⁴ MΩ @ 500V d.c.	$>10^{5}$ M Ω @ 500V d.c.
A.C. Breakdown:	5kV @ 50Hz	5kV @ 50Hz
Contact Resistance:	<5mΩ	<10mΩ
Operating Temp: (ambient air temp + fuse temp rise)	-20°C to +85°C	-20°C to +85°C
Base Material:	Glass Filled Polyester UL94V-0 rated	Glass Filled Polyester UL94V-0 rated
Contacts:	Clips: Phospher Bronze, Tin Plated Tabs: Brass, Tin Plated	Phospher Bronze, Tin Plated
RoHS	Compliant	Compliant



	 Protection Category PC1 Fuse Sizes 5 x 20mm, 6.3 x 25mm and 6.3 x 32mm Screw Terminal (Solder to ord 10A, 50V (250V Inaccessible) UL Approved (Black Only) Clear or black 	der)
In-line FX0185, F	 Sealed to IP66 Protection Category PC1 Fuse Sizes 5 x 20mm, 6.3 x 25mm and 6.3 x 32mm Screw Terminal (Solder to orc 10A, 50V (250V Inaccessible) UL Approved (Black Only) Clear or black 	der) Stage 1
Specifications	FX0180/colour, FX0280.colour, FX0380/Colour	FX0185/Colour, FX0285/colour, FX0385/Colour
Fuse Size:	5 x 20mm FX0380 6.3 x 25mm FX0280 6.3 x 32mm FX0180	5 x 20mm FX0385 6.3 x 25mm FX0285 6.3 x 32mm FX0185
Cable Acceptance:	1mm ² conductor (max.)	1mm2 conductor (max.) 1mm to 2.64mm overall diameter Stepped grommet: Stage 1: 1.00mm to 1.40mm Stage 2: 1.50mm to 1.90mm Stage 3: 2.0mm to 2.64mm
Terminations:	Screw terminal (solder to order)	Screw Terminal (solder to order)
Max. Rating:	10A, 50V (250V where inaccessible inside equipment)	10A, 50V (250V where inaccessible inside equipment)
Insulation Resistance: High Voltage Proof Test: Contact Resistance:	>10 ⁵ MΩ @ 500V d.c. 2kV (50Hz for 1 minute) <10mΩ	>10 ⁵ MΩ @ 500V d.c. 2kV (50Hz for 1 minute) <10mΩ
Operating Temp: (ambient air temp + fuse temp rise)	-20°C to +90°C	-20°C to +70°C
Sealing:		Protection Classification IP66 EN60529: 1992+A2:2013
Screw Tightening Torque	0.226Nm (2lb/in)	0.226Nm (2lb/in)
Mouldings: Body - Clear: Body - Black: Grommet: O Ring: Contacts:	Polybutene UL94HB rated Nylon 6 UL94V-0 rated	Polybutene UL94HB rated Nylon 6 UL94V-0 rated PVC Nitrile
Terminals: Grub Screw:	Brass, Nickel Plated Stainless Steel	Brass, Nickel Plated Stainless Steel
Approvals:	(Black version only)	(Black version only)
Colour: RoHS	Clear - no suffix, /BK - Black Compliant	Clear - no suffix, /BK - Black Compliant

Fuseholders Accessories



Insualtion Boots	 Provide Insulation against Shock on Rear of Fuseholder PVC UL94V-0 rated flame retardant material 	9820 9820 9820 9820 9820 971 381 383 345 97 9820 9820 971 9820 9820 971 9820 9820 971 9820 9820 971 9820 9820 971 9820 9820 971 9820 971 9820 971 9820 971 9820 971 9820 971 9820 971 9820 971 9820 971 9820 971 972
PNo. 11327 PNo. 12932 PNo. 9820		87.0 gl
Insualtion Cover	 Provide Insulation from Live Parts on Fuseholder Clear Polycarbonate 	2 Holes Ø 3.0 9 29.0 12760
Adaptor PNo. 12297	 Adaptor to Convert Fixing Holes Maintains Anti-Rotation Glass Filled Nylon 	1.3 Ø17.5 12297

Accessories	For Use With:
P.No. 9820 (Boot)	FX0296, FX0296/1, FX0296/S
P.No. 11327 (Boot)	FX0354, FX0354/S, FX0357, FX0359, FX0454, FX0454/S, FX0455, FX0455/S, FX0460, FX0458, FX0369, FX0462, FX0463
P.No. 12932 (Boot)	FX0415, FX0415/S, FX0416, FX0416/S
P.No. 12760 (Cover)	FX0267, FX0321
Max. Working Voltage:	250V a.c.
Flash Tested to:	2kV a.c.
Material:	P.Nos. 9820, 11327, 12932: PVC - UL94V-0 P.No. 12760: Polycarbonate
P.No. 12297 (Adaptor Washer)	Adapts 'D' fixing to anti-rotation Key Fixing FX0455, FX0455/S
Material:	Glass Filled Nylon
RoHS	Compliant