

SPECIFICATION FOR APPROVAL

Description.	DC FAN			
Part No.		REV.		
Delta Model No.	FFC0612DE-PP01	REV.	00	
Sample Issue No.				
Sample Issue Date.	Aug-27-2013			
	NE COPY OF THIS SPECIFIC OU SIGNED APPROVAL FOR ANGEMENT.			
APPROVED BY	Y:			
DATE:				

Delta Electronics, Inc. HeTianXia High-Tech Industrial Park. Shi Jie Town, Dong Guan City. Guangdong Province, China. P. R. C.

TEL: 86-769-86329008 FAX: 86-769-86631589

Customer.

Delta Electronics, Inc. HeTianXia High-Tech Industrial Park. Shi Jie Town, Dong Guan City. Guangdong Province, China. P. R. C.

TEL: 86-769-86329008 FAX: 86-769-86631589

DESCRIPTION:	NONE	
DESCRITION.	NONE DESCRIPTION .	
	DESCRIPTION:	

Delta Electronics, Inc.

HeTianXia High-Tech Industrial Park.

Shi Jie Town, Dong Guan City.

Guangdong Province, China. P. R. C.

TEL: 86-769-86329008 FAX: 86-769-86631589

SPECIFICATION FOR APPROVAL

Customer:			
Description:	DC FAN		
Customer P/N:		REV:	
Delta Model NO.:	FFC0612DE-PP01	Safety Delta Model NO.: FFC06	12DE
Sample Rev:	00	Issue N0:	
Sample Issue Date:	Aug-27-2013	Quantity:	

1. SCOPE:

THIS SPECIFICATION DEFINES THE ELECTRICAL AND MECHANICAL CHARACTERISTICS OF THE DC BRUSHLESS AXIAL FLOW FAN. THE FAN MOTOR IS WITH SINGLE PHASE AND FOUR POLES.

2. CHARACTERS:

ITEM	DESCRIPTION
RATED VOLTAGE	12 VDC
OPERATION VOLTAGE	7.0 - 13.2 VDC
INPUT CURRENT	0.90 (MAX. 1.20) A SAFETY CURRENT 1.20A)
INPUT POWER	10.80 (MAX. 14.40) W
SPEED (REF.)	9000 R.P.M.
MAX. AIR FLOW (AT ZERO STATIC PRESSURE)	1.55 (MIN. 1.395) M ³ /MIN. 54.79 (MIN. 49.3) CFM
MAX. AIR PRESSURE (AT ZERO AIRFLOW)	30.02 (MIN. 24.3) mmH ₂ 0 1.182 (MIN. 0.96) inchH ₂ 0
ACOUSTICAL NOISE (AVG.)	60.0 (MAX. 64.0) dB-A
INSULATION TYPE	UL: CLASS A

(continued)


A00

PART NO:	
DELTA MODEL: FFC0612DE-PP01	

INSULATION STRENGTH	10 MEG OHM MIN. AT 500 VDC (BETWEEN FRAME AND (+) TERMINAL)
DIELECTRIC STRENGTH	5 mA MAX. AT 500 VAC 60 Hz ONE MINUTE, (BETWEEN FRAME AND (+) TERMINAL)
EXTERNAL COVER	OPEN TYPE
LIFE EXPECTANCE (AT LABEL VOLTAGE)	70,000 HOURS CONTINUOUS OPERATION AT 40 °C WITH 15 ~ 65 %RH.
ROTATION	CLOCKWISE VIEW FROM NAME PLATE SIDE
OVER CURRENT SHUT DOWN	THE CURRENT WILL SHUT DOWN WHEN LOCKING ROTOR.
LEAD WIRE	UL 1061 -F- AWG #24 BLACK WIRE NEGATIVE(-) RED WIRE POSITIVE(+) BLUE WIRE FREQUENCY(-F00) YELLOW WIRE CONTROL (-PWM)

NOTES: 1. ALL READINGS ARE MEASURED AFTER STABLY WARMING UP THROUGH 10 MINUTES.

- 2. STANDARD AIR PROPERTY IS AIR AT (Td) 25°C TEMPERATURE, (RH) 65% RELATIVE HUMIDITY, AND (Pb) 760 mmHg BAROMETRIC PRESSURE.
- 3. THE VALUES WRITTEN IN PARENS, (), ARE LIMITED SPEC.
- 4. ACOUSTICAL NOISE MEASURING CONDITION:

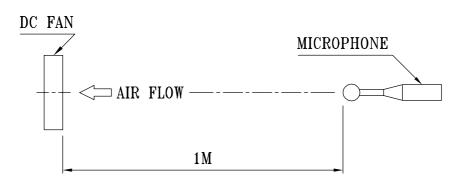

NOISE IS MEASURED AT RATED VOLTAGE IN FREE AIR IN SEMI-ANECHOIC CHAMBER WITH B & K SOUND LEVEL METER WITH MICROPHONE AT A DISTANCE OF ONE METER FROM THE FAN INTAKE.

page: 2 A00

PART NO:			
DELTA MOD	DEL: FFC0612DE-P	P01	

3. MECHANICAL:

- 3-1. DIMENSIONS ----- SEE DIMENSIONS DRAWING
- 3-2. FRAME ------ PLASTIC UL: 94V-0
- 3-3. IMPELLER ------ PLASTIC UL: 94V-0
- 3-4. BEARING SYSTEM ----- TWO BALL BEARINGS
- 3-5. WEIGHT ----- 106 GRAMS

4. ENVIRONMENTAL:

- 4-2. STORAGE TEMPERATURE ------ -40 TO +75 DEGREE C
- 4-3. OPERATING HUMIDITY ----- 5 TO 90 % RH
- 4-4. STORAGE HUMIDITY ----- 5 TO 95 % RH

5. PROTECTION:

- 5-1. LOCKED ROTOR PROTECTION

 IMPEDANCE OF MOTOR WINDING PROTECTS MOTOR FROM FIRE IN 96
 HOURS OF LOCKED ROTOR CONDITION AT THE RATED VOLTAGE.
- 5-2. POLARITY PROTECTION

 BE CAPABLE OF WITHSTANDING IF REVERSE CONNECTION FOR POSITIVE AND NEGATIVE LEADS.

6. RE OZONE DEPLETING SUBSTANCES:

6-1. NO CONTAINING PBBs, PBB0s, CFCs, PBBEs, PBDPEs AND HCFCs.

7. PRODUCTION LOCATION


7-1. PRODUCTS WILL BE PRODUCED IN CHINA OR THAILAND.

D.D. NO

PART NO:

DELTA MODEL: FFC0612DE-PP01

8. P & Q CURVE:

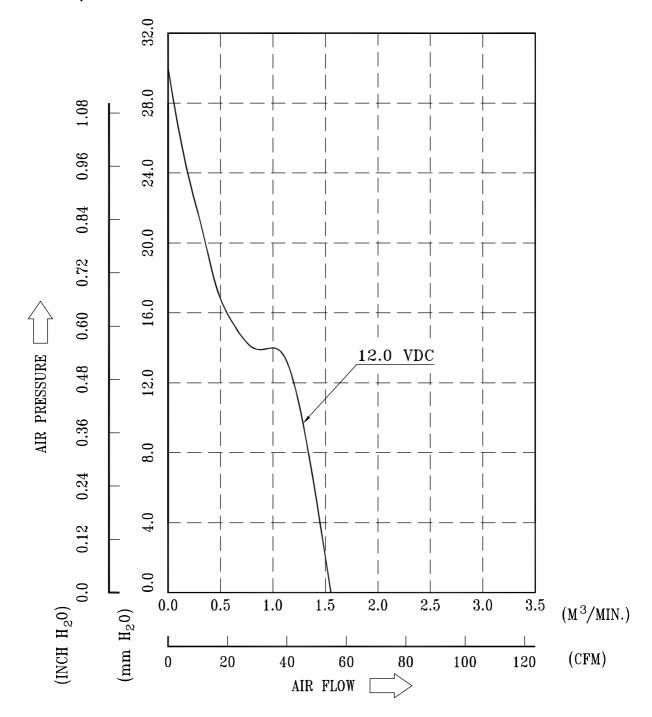

* TEST CONDITION: INPUT VOLTAGE ---- OPERATION VOLTAGE TEMPERATURE ---- ROOM TEMPERATURE HUMIDITY ----- 65%RH


A00

PART NO:
DELTA MODEL: FFC0612DE-PP01

9. DIMENSION DRAWING:

LABEL:



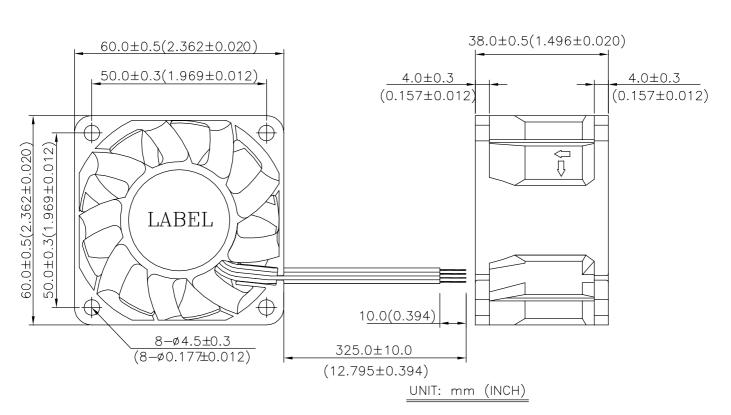

NOTES:

1. LEAD WIRE UL1061 AWG#24 RED WIRE---(+)

BLACK WIRE---(-)

BLUE WIRE---(FOO)

YELLOW WIRE----(PWM)

2. THIS PRODUCT IS ROHS COMPLIANT


page: 5

PART NO:

DELTA MODEL: FFC0612DE-PP01

10. FREQUENCY GENERATOR (FG) SIGNAL:



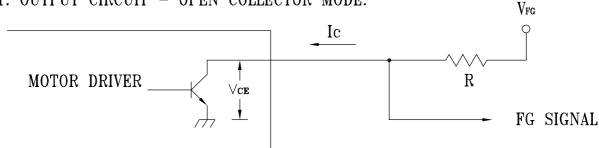

CAUTION:

THE LEAD WIRE OF FG SIGNAL CAN NOT TOUCH THE LEAD WIRE OF POSITIVE OR NEGATIVE.

10−2. SPECIFICATION:


Vce (sat)=0.5V MAX.

 $V_{FG} = 16 VDC MAX.$


 $I_c = 5mA MAX.$

 $R \ge V_{FG} / I_{C}$

10-3. FREQUENCY GENERATOR WAVEFORM:

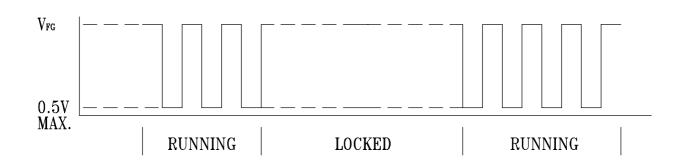

FAN RUNNING FOR 4 POLES

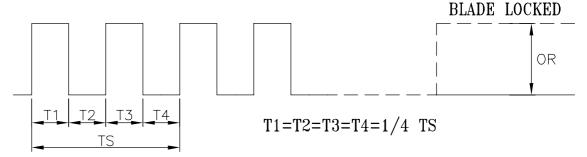

N=R.P.M

TS=60/N(SEC)

*VOLTAGE LEVEL AFTER BLADE LOCKED

*4 POLES

page: 6


A00

PART NO:

DELTA MODEL: FFC0612DE-PP01

11. PWM CONTROL SIGNAL:


SIGNAL VOLTAGE RANGE: 0~20 VDC

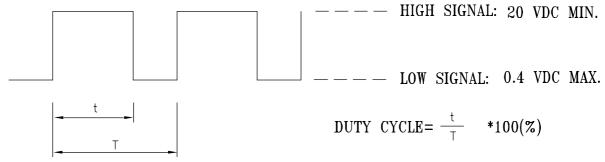

- THE FREQUENCY FOR CONTROL SINGAL OF THE FAN SHALL BE ABLE TO ACCEPT AT 30~300K Hz.
- THE PREFERRED OPERATING POINT FOR THE FAN IS 20K Hz.
- AT 100% DUTY CYCLE, THE ROTOR WILL SPIN AT MAXIMUM SPEED.
- AT 0% DUTY CYCLE, THE ROTOR WILL STOP SPIN .
- WITH CONTROL SIGNAL LEAD DISCONNECTED, THE FAN WILL SPIN AT MAXIMUM SPEED.
- AT 20K HZ 30% DUTY CYCLE ,THE FAN WILL BE ABLE TO START FROM A DEAD STOP .
- 12. SPEED VS PWM CONTROL SIGNAL:
 (AT RATED VOLTAGE & PWM FRUQUENCY=20K Hz)

DUTY CYCLE (%)	SPEED R.P.M. (REF.)	CURRENT (A) TYP.
100	9000±10%	0.90
60	4900±10%	0.27
0	0	0

13. PWM CONTROL LEAD WIRE INPUT IMPEDANCE:



13-1. THE FAN SPEED WILL DEFAULT TO MAXIMUM WHEN THE SPEED CONTROLL INPUT IS LEFT UNCONNECTED.

page: 7 A00



Application Notice

- 1. Delta will not guarantee the performance of the products if the application condition falls outside the parameters set forth in the specification.
- 2. A written request should be submitted to Delta prior to approval if deviation from this specification is required.
- 3. Please exercise caution when handling fans. Damage may be caused when pressure is applied to the impeller, if the fans are handled by the lead wires, or if the fan was hard-dropped to the production floor.
- 4. Except as pertains to some special designs, there is no guarantee that the products will be free from any such safety problems or failures as caused by the introduction of powder, droplets of water or encroachment of insect into the hub.
- 5. The above-mentioned conditions are representative of some unique examples and viewed as the first point of reference prior to all other information.
- 6. It is very important to establish the correct polarity before connecting the fan to the power source. Positive (+) and Negative (-). Damage may be caused to the fans if connection is with reverse polarity, if there is no foolproof method to protect against such error specifically mentioned in this spec.
- 7. Delta fans without special protection are not suitable where any corrosive fluids are introduced to their environment.
- 8. Please ensure all fans are stored according to the storage temperature limits specified. Do not store fans in a high humidity environment. We highly recommend performance testing is conducted before shipping, if the fans have been stored over 6 months.
- 9. Not all fans are provided with the Lock Rotor Protection feature. If you impair the rotation of the impeller for the fans that do not have this function, the performance of those fans will lead to failure.
- 10. Please be cautious when mounting the fan. Incorrect mounting of fans may cause excess resonance, vibration and subsequent noise.
- 11. It is important to consider safety when testing the fans. A suitable fan guard should be fitted to the fan to guard against any potential for personal injury.
- 12. Except where specifically stated, all tests are carried out at room (ambient) temperature and relative humidity conditions of 25°C, 65% RH. The test value is only for fan performance itself.
- 13. Be certain to connect an "4.7μF or greater" capacitor to the fan externally when the application calls for using multiple fans in parallel, to avoid any unstable power.

Doc. No: FMBG-ES Form 001 Rev. 0001 Date: June 24, 2009