
Thermofit Molded Parts Specification Control Drawing Limited Distribution

NOTES

- 1. All dimensions are in $\frac{\text{inches}}{[\text{millimeters}]}$
- 2. Dimensions appearing in table are as follows:
 - a As Supplied
 - b After Unrestricted Recovery
- Coating is optional. As supplied dimensions appearing in table are for uncoated parts. When coating is added, entry diameters will be reduced by .06 max.

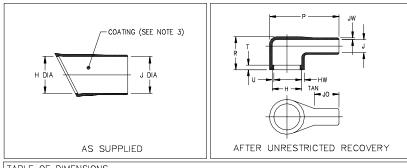

Part Number :

Description :

222D2XX-X-01

Boot, 90°, With Lip

TABLE OF DIMENSIONS											
PART NUMBER	н		J		Р	R	Т	U	JO	HW	JW
	Min	Max	Min	Max	±10%	Ref	Ref	Ref	Ref	±20%	±20%
	a	ь	a	ь	b	ь	ь	ь	ь	ь	b
222D211-X-01	.88	.45	.88	.25	1.90	.73	.12	.04	1.21	.06	. <u>045</u>
	[22,3]	[5,1]	[22,3]	[6,3]	[48,2]	[18,5]	[3,0]	[1,0]	[30,7]	[1,5]	[1,1]
222D221-X-01	1.01	.59	1.01	.29	2.36	.78	. <u>12</u>	.04	1.38	.06	. <u>045</u>
	[25,7]	[15,0]	[25.7]	[7.4]	[59,9]	[19.8]	[3,0]	[1,0]	[35,0]	[1,5]	[1,1]
222D232-X-01	1.16	.74	1.16	.33	3.00	<u>.82</u>	. <u>12</u>	.04	1.74	.07	.045
	[29,5]	[18,8]	[29,5]	[8,4]	[76,2]	[20,8]	[3,0]	[1,0]	[44,2]	[1,8]	[1,1]
222D242-X-01	1.34	.90	1.34	.38	2.10	<u>.86</u>	. <u>12</u>	.04	<u>.54</u>	.07	.045
	[34,0]	[22,9]	[34,0]	[9,7]	[53,3]	[21,8]	[3,0]	[1,0]	[13,7]	[1,8]	[1,1]
222D263-X-01	1.72	1.34	1.72	. <u>48</u>	<u>5.00</u>	1.08	. <u>12</u>	. <u>065</u>	3.25	.08	. <u>045</u>
	[43,7]	[34,0]	[43,2]	[12,2]	[127,0]	[27,4]	[3,0]	[1,6]	[82,5]	[2.0]	[1,1]

Raychem

If this document is printed it becomes uncontrolled. Check for the latest revision.

RAYCHEM CORPORATION 300 CONSTITUTION DRIVE MENLO PARK, CALIFORNIA 94025

 Revision : D
 Part Number : 222D2XX-X-01

 Date : 3/29/00
 Description : Boot, 90*, With Lip


Part Number :

222D2XX-X-01

Description: Boot, 90°, With Lip

Thermofit Molded Parts Specification Control Drawing Limited Distribution

COMPATABILITY CHART										
MATERIAL DASH NO.	MATERIAL DESCRIPTION	RT SPEC	COATING SLASH NO.	COATING S NO.	COATING DESCRIPTION					
-3	Polyolefin, Semi-Rigid	RT-301	N/A							
-4	Polyolefin, Flexible	RT-1304	N/A							
-25	Elastomer, Fluid Resistant	RT-1325	/42	S-1017	Adhesive					



THIS DRAWING IS SUBJECT TO CHANGE WITHOUT NOTICE; CONSULT YOUR NEAREST FIELD REPRESENTATIVE FOR CURRENT REVISION

Raychem

RAYCHEM CORPORATION 300 CONSTITUTION DRIVE MENLO PARK, CALIFORNIA 94025

Revision: D
Date: 3/29/00

Part Number: 222D2XX-X-01

Description: Boot, 90°, With lip

CAD FILE MP00041